

MISTER BATTERY +



Rechargeable LiFePO4 12V 150Ah

RNS B12150 BLU

Benefits : | Longer Cycle Life
Lighter Weight
Higher Power
Wider Temperature Range
Superior Safety

Applications : | Electric vehicles, Golf cart /RV /Marine
Solar/wind energy storage system
UPS, back up power, Telecommunication
General purpose lead acid battery replacement
Compatible with most lead acid chargers

Electrical Characteristics	Nominal Voltage	12,8V
	Nominal Capacity	150Ah
	Energy	1.920Wh
	Cycle Life	>3.000 cycles @ 0,2C 80% DOD
	Months Self Discharge	<3%
	Efficiency of Charge	>99% @0,2C
	Efficiency of Discharge	96~99%@0,5C
Standard Charge	Charge Voltage	14,6±0.2V
	Charge Mode	CC/CV
	Charge Current	30A
	Max. Charge Current	150A
Standard Discharge	Continuous Current	150A
	Max.Pulse Current	160A(<3s)
	Discharge Cut-off Voltage	11V
Environmental	Charge Temperature	0°C to 55°C @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C @60±25% Relative Humidity
	Storage Temperature	-20°C to 45°C @60±25% Relative Humidity
	IP Class	IP65
	Certifications	CE, RoHS, UN38.3
Mechanical	Plastic Case	ABS+PC (the upper cover can be removed for maintenance)
	Connection	M8
	Weight	19,8KG
	Dimensions	350mm x 171mm x 258mm
Applications	Installation	Parallel connection Series connection possibilities
	Control	Battery management system (BMS) integrated
	Monitoring	Bluetooth monitoring, iOS & Android App

Specifications are subject to change without notice to improve reliability, function, design or otherwise.


MISTER BATTERY +

Rechargeable LiFePO4 12V 150Ah


RNS B12150 BLU




Different Rate Discharge Curve(25°C)

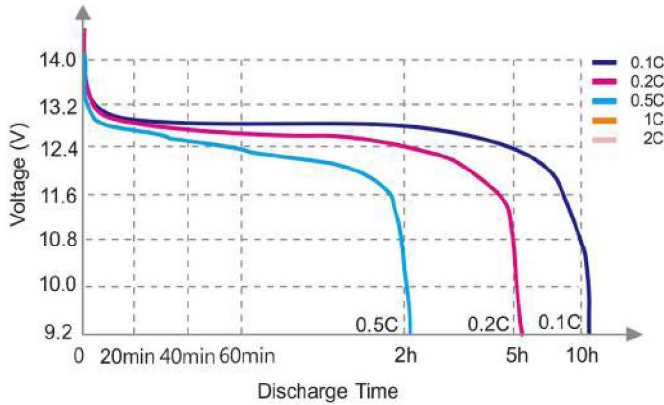


Different Temperature Discharge Curve(0.5C)

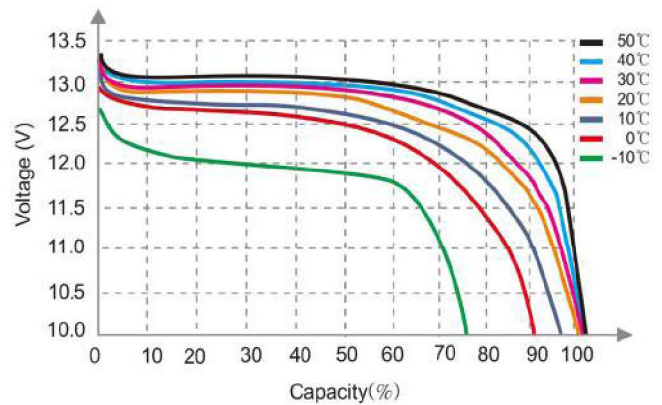


State of Charge Curve(0.5C, 25°C)

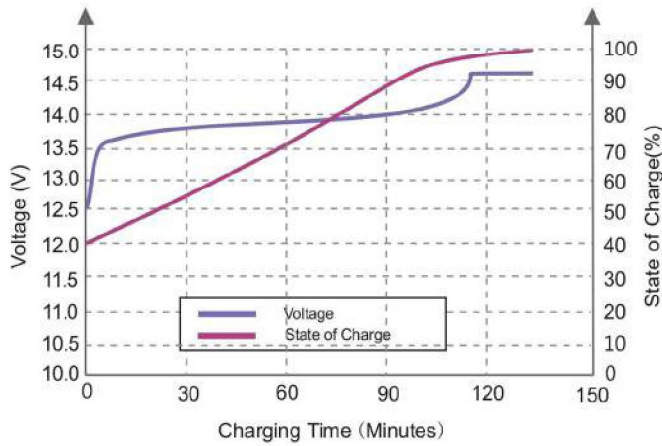

Charging Characteristics(0.5C, 25°C)

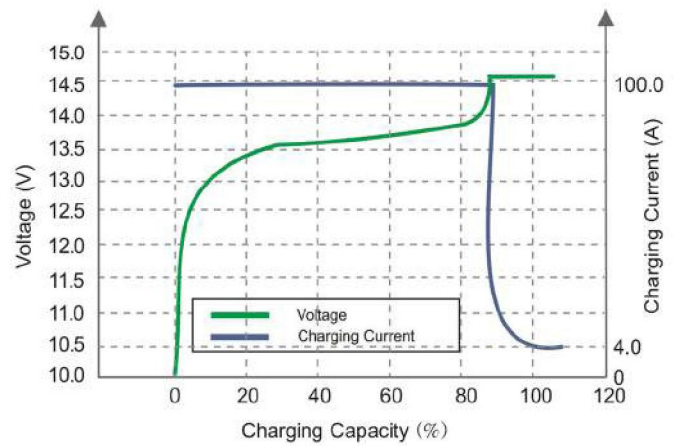

Different DOD Discharge Cycle Life Curve(0.5C)

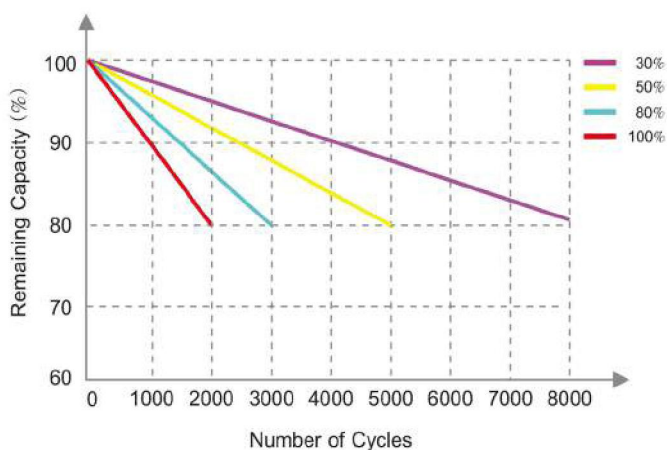

Different Temperature Self Discharge Curve

