


MISTER BATTERY +

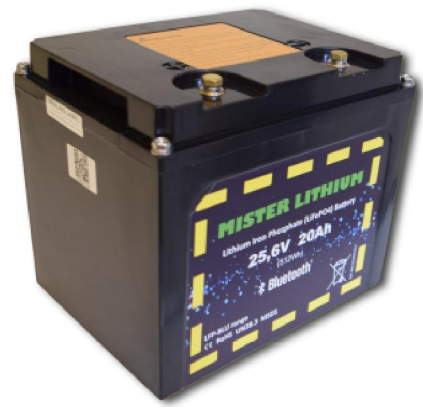

Rechargeable LiFePO4 24V 20Ah

RNS B24020 BLU

Benefits : Longer Cycle Life
Lighter Weight
Higher Power
Wider Temperature Range
Superior Safety

Applications : Electric vehicles, Golf cart /RV /Marine
Solar/wind energy storage system
UPS, back up power, Telecommunication
General purpose lead acid battery replacement
Compatible with most lead acid chargers

Electrical Characteristics	Nominal Voltage	25,6V
	Nominal Capacity	20Ah
	Energy	512Wh
	Cycle Life	>3.000 cycles @ 0,2C 80% DOD
	Months Self Discharge	<3%
	Efficiency of Charge	>99% @0,2C
	Efficiency of Discharge	96~99%@0,5C
Standard Charge	Charge Voltage	29,2±0.2V
	Charge Mode	CC/CV
	Charge Current	4A
	Max. Charge Current	30A
Standard Discharge	Continuous Current	30A
	Max.Pulse Current	35A(<3s)
	Discharge Cut-off Voltage	22,4V
Environmental	Charge Temperature	0°C to 55°C @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C @60±25% Relative Humidity
	Storage Temperature	-20°C to 45°C @60±25% Relative Humidity
	IP Class	IP65
	Certifications	CE, RoHS, UN38.3
Mechanical	Plastic Case	ABS+PC (the upper cover can be removed for maintenance)
	Connection	M6
	Weight	5,5KG
	Dimensions	199mm x 151mm x 170mm
Applications	Installation	Parallel connection allowed
	Control	Battery management system (BMS) integrated
	Monitoring	Bluetooth monitoring, Smartphone App

Specifications are subject to change without notice to improve reliability, function, design or otherwise.


MISTER BATTERY +

Rechargeable LiFePO4 24V 20Ah


RNS B24020 BLU




Different Rate Discharge Curve(25°C)

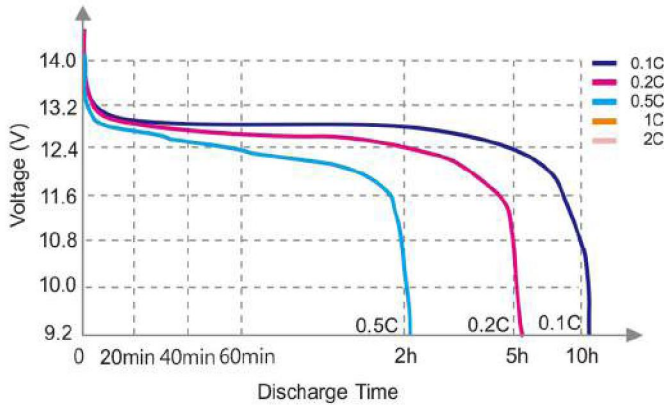


Different Temperature Discharge Curve(0.5C)

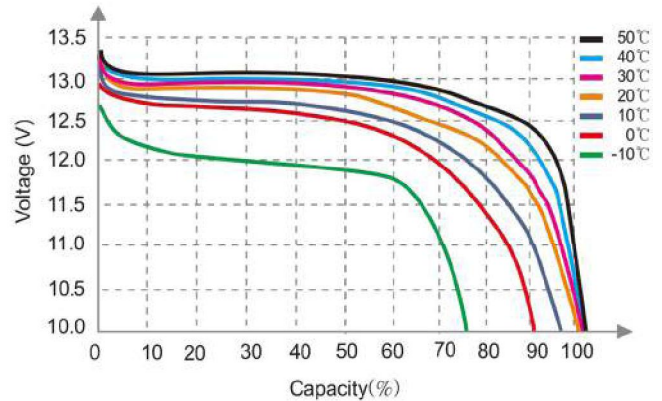


State of Charge Curve(0.5C, 25°C)

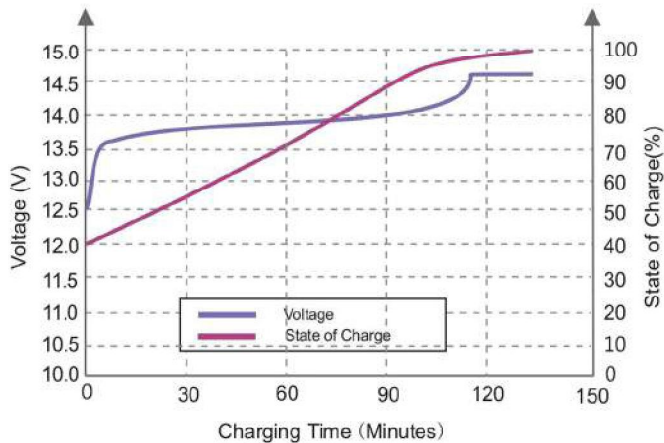

Charging Characteristics(0.5C, 25°C)

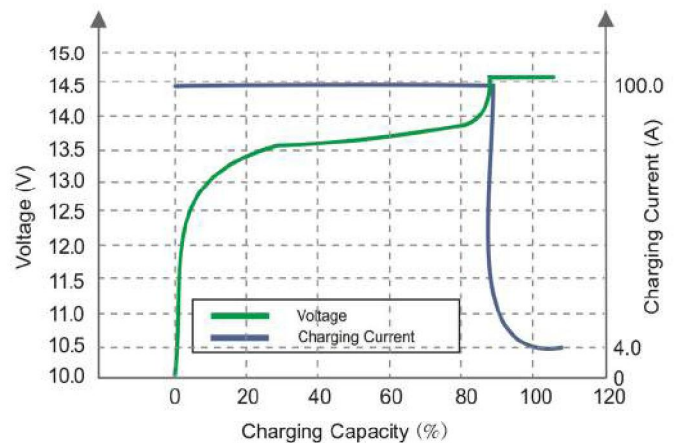

Different DOD Discharge Cycle Life Curve(0.5C)

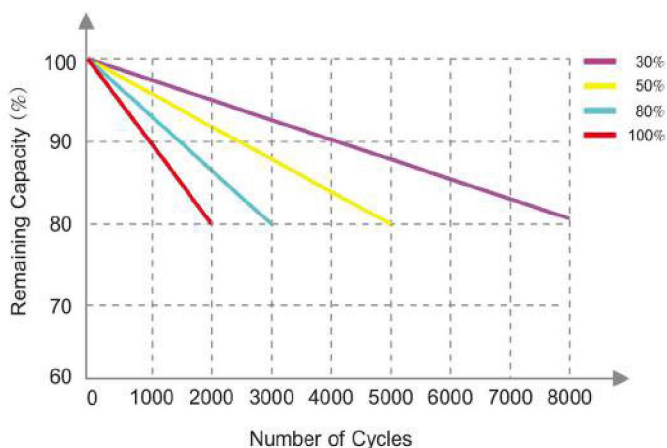

Different Temperature Self Discharge Curve

